

DATA OUTPUT

MINI DIGITAL HEIGHT GAUGES

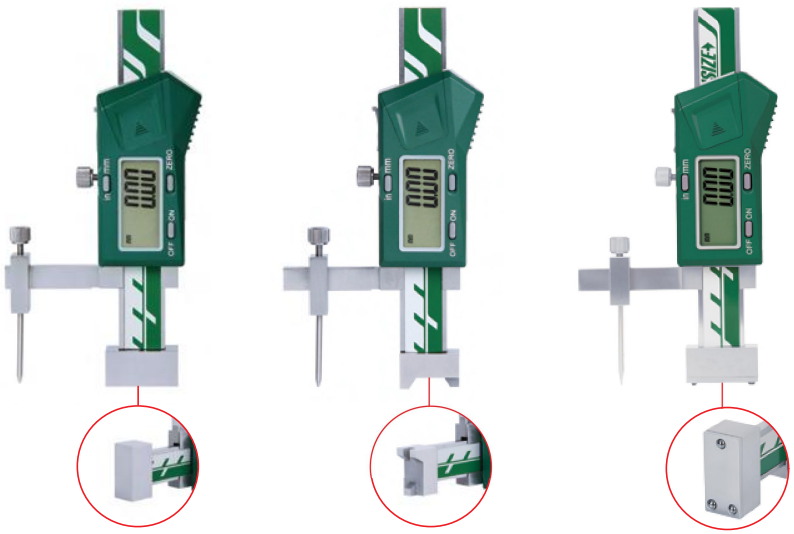


1146-20A　　1146-20B　　1146-20D


Unit: mm



type **A**




type **B**




type **D**

- Non waterproof
- Measure height difference of two surfaces (type **B** and type **D** suitable for surfaces with barrier, such as rivet)
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel

application of type **A**



application of type **B** and type **D**



With data interface (optional wireless transmitter code 7315-25, receiver is needed) **(mm)**

Code	Range	Accuracy	Type	a	b	L	Ød
1146-20A	0~±20mm/0~±0.8"	±0.02mm	A	25	25	128	2
1146-30A	0~±30mm/0~±1.2"	±0.02mm	A	20	30	154	2
1146-50A	0~±50mm/0~±2.0"	±0.02mm	A	20	50	194	2
1146-100A	0~±100mm/0~±4.0"	±0.03mm	A	20	100	294	3
1146-20B	0~±20mm/0~±0.8"	±0.02mm	B	—	25	128	2
1146-20D	0~±20mm/0~±0.8"	±0.02mm	D	—	25	128	2

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed) **(mm)**

Code	Range	Accuracy	Type	a	b	L	Ød
1146-20AWL	0~±20mm/0~±0.8"	±0.02mm	A	25	25	128	2
1146-30AWL	0~±30mm/0~±1.2"	±0.02mm	A	20	30	154	2
1146-50AWL	0~±50mm/0~±2.0"	±0.02mm	A	20	50	194	2
1146-100AWL	0~±100mm/0~±4.0"	±0.03mm	A	20	100	294	3
1146-20BWL	0~±20mm/0~±0.8"	±0.02mm	B	—	25	128	2
1146-20DWL	0~±20mm/0~±0.8"	±0.02mm	D	—	25	128	2