CROSS-LINE LASER LEVEL
CODE 4917-30

VIDEO


- Red horizontal and vertical cross laser lines
- Self-leveling within ±3°, self-leveling time within 4s, audible and visual warning when out of ±3°
- Folding legs for angle and height adjustment
- Outdoor use can be combined with the detector (code: **4917-DETECTOR**)



IP54
WATERPROOF

AUDIBLE AND VISUAL WARNING WHEN OUT OF ±3°

folding legs for angle and height adjustment

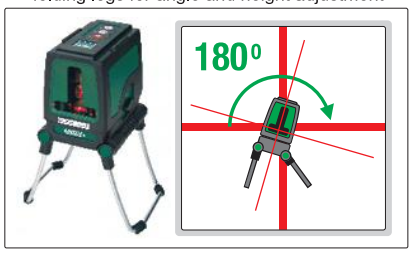

application examples



STANDARD DELIVERY

Main unit	1 pc
1/4" to 5/8" tripod adaptor	1 pc
Battery (AA)	3 pcs

OPTIONAL ACCESSORY

Outdoor detector	4917-DETECTOR

SPECIFICATION

Laser line width	2±0.5mm (within 5m)
Laser type	630~660nm, class II, <1mW
Beam angle	120±0.5°
Self-leveling range	±3°
Working distance	indoor: 30m, outdoor: 50m with detector (**optional**)
Accuracy	0.3mm/m
Operation temperature	-10~40°C
Power supply	3×AA batteries, for 3 hours working
Dimension(L×W×H)	100×82×104mm
Net weight	620g



outdoor detector (**optional**)

OUTDOOR DETECTOR (OPTIONAL)

Detecting distance	horizontal 1~50m, vertical 1~30m
Detecting accuracy *	high accuracy ±1.5mm, low accuracy ±2. 5mm
Power supply	9V battery
Dimension(L×W×H)	168×58×30mm
Net weight	140g (battery included)



stand
(included with outdoor detector)

* Use high accuracy detection mode within 15m, use low accuracy detection mode over 15m