
HIGH POWER DC POWER SUPPLIES

VIDEO



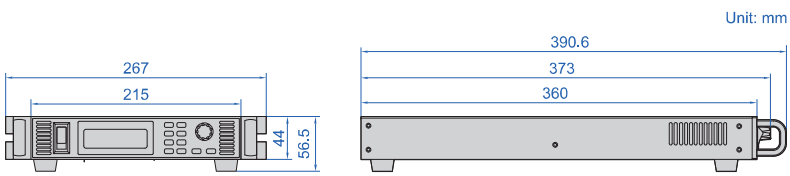

- High precision and low ripple
- OVP/OCP/OPP/OTP protection
- 1U half rack, suitable for system integration
- Remote compensation function
- Various communication interfaces

SPECIFICATION

Code		9915-NCK61	9915-NCK62	9915-NCK63	9915-NCK91	9915-NCK92	9915-NC1K1
Rate output voltage		0~30V	0~60V	0~100V	0~30V	0~60V	0~100V
Rate output current		0~20A	0~10A	0~6A	0~30A	0~15A	0~10A
Maximum output power		600W			900W		1000W
Voltage	setting resolution	1mV		10mV	1mV		10mV
	setting accuracy	≤0.05%+0.2%FS	≤0.05%+0.1%FS		≤0.05%+0.2%FS	≤0.05%+0.1%FS	
	readback resolution	1mV		10mV	1mV		10mV
	readback accuracy	≤0.05%+0.2%FS	≤0.05%+0.1%FS		≤0.05%+0.2%FS	≤0.05%+0.1%FS	
	load regulation	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV
	line regulation	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV	≤0.05%+20mV	≤0.1%+20mV	≤0.1%+30mV
	ripple	≤30mVrms	≤60mVrms	≤80mVrms	≤30mVrms	≤60mVrms	≤80mVrms
Current	setting resolution	1mA					
	setting accuracy	≤0.1%+0.1%FS	≤0.1%+0.5%FS		≤0.1%+0.1%FS	≤0.1%+0.5%FS	
	readback resolution	1mA					
	readback accuracy	≤0.1%+0.2%FS	≤0.1%+0.5%FS		≤0.1%+0.2%FS	≤0.1%+0.5%FS	
	load regulation	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA
	line regulation	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA	≤0.05%+20mA	≤0.1%+20mA	≤0.1%+30mA
	ripple	≤30mArms	≤60mArms	≤80mArms	≤30mArms	≤60mArms	≤80mArms
Work condition		temperature: 0°C~40°C, humidity: 20%RH~80%RH					
Storage condition		temperature: -10°C~55°C, humidity: 10%RH~90%RH					
Cool system		fan cool					
Power supply		220V±10%, 50Hz/60Hz					
Dimension (L×W×H)		215×360×44mm					
Weight		4kg					